

Certified, Filed and or Recorded on
Oct. 14, 2008 AT 10:16AM

Signed: CK
MARILYN J NOVAK G V
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 33, Township 36N, Range 29W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 10/10/08 found a 1/2" I.P. UNDER BIT.

left monument as found lowered monument removed monument (explain)

On 10/10/08 placed an P.K. NAIL WITH BENTON COUNTY SURVEYOR DISK

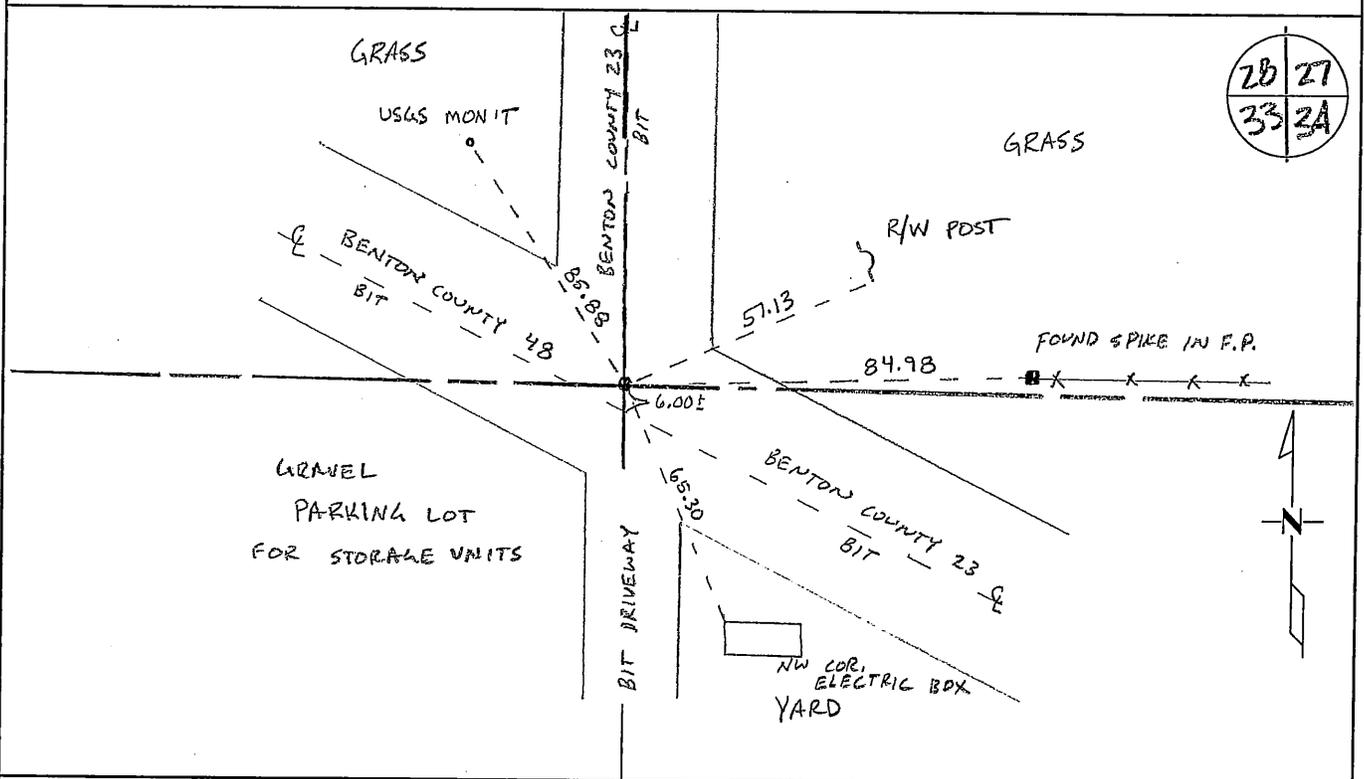

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jan W. Oly
Deputy Benton County Surveyor
License No. 45872

Date: 10-13-2008

Statement of Evidence:

K332

The Northeast Corner of Section 33, Township 36 North, Range 29 West, St. George Township, 4th Principal Meridian, Benton County, Minnesota.

- 1855 Original US General Land Office survey established corner marked by a wood post with bearing trees:
- | | | |
|-------------|----------------------|-----------|
| 12" Blk Oak | S 28 $\frac{3}{4}$ W | 727 links |
| 7" Blk Oak | N 77 E | 135 links |
- 1914 County Road Book, pages 127 to 130, shows a survey for State Road No. 8. Tie: T.P. N 52 W 44 feet.
- 1931 County Engineer's notebook No. 61 shows corner 196 feet south of town road.
- 1979 Benton County Highway Department assumed corner on fence line east and west for CSAH 23 project.
- 1995 Record plat of STONY BROOK ESTATES by William Lunser, LS 9394, shows corner.
- 1996 William Lunser, LS 9394, set a $\frac{1}{2}$ " pipe at the centerline of roads north and a fence line east/west. He filed a Certificate of Location (#234173). He notes a distance of 2662.18 feet to the North $\frac{1}{4}$ corner Sec. 34 and a distance of 2719.96 feet to the East $\frac{1}{4}$ corner of Sec 33.
- 2003 Westwood Professional Services, Inc. found a $\frac{1}{2}$ " iron pipe.
County Coordinates Obtained by GPS
NAD 83 (1996 Adjustment)
N- 105599.463
E- 526896.919

This corner is noted on the following recorded plats

<i>EAGLE VIEW COMMONS</i>	8/16/1998	William Lunser
<i>STONY BROOK ESTATES</i>	5/25/1995	William Lunser


- 2008 The County Surveyor's Office searched and found a $\frac{1}{2}$ " iron pipe as set by Lunser in 1996 at 6 ft. north of centerline under County Road 23 (bituminous) and on line with the centerline of north-south County Road 23 leading to the north. Position also fits fence line leading east of County Road 23, as referenced in 1979. The Surveyor accepts the position and set a PK Nail with a Benton County washer at surface of bituminous road and updated ties to same. Coordinates obtained by GPS agree with those reported by Westwood Professional Services, Inc in 2003.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST corner of Section 33, Township 36, Range 29, 4th P.M.
Benton County, Minnesota.

On Mar 10, 1996, A 1/2 inch iron pipe (I.P.) was placed at this location.

SKETCH OF REFERENCE TIES

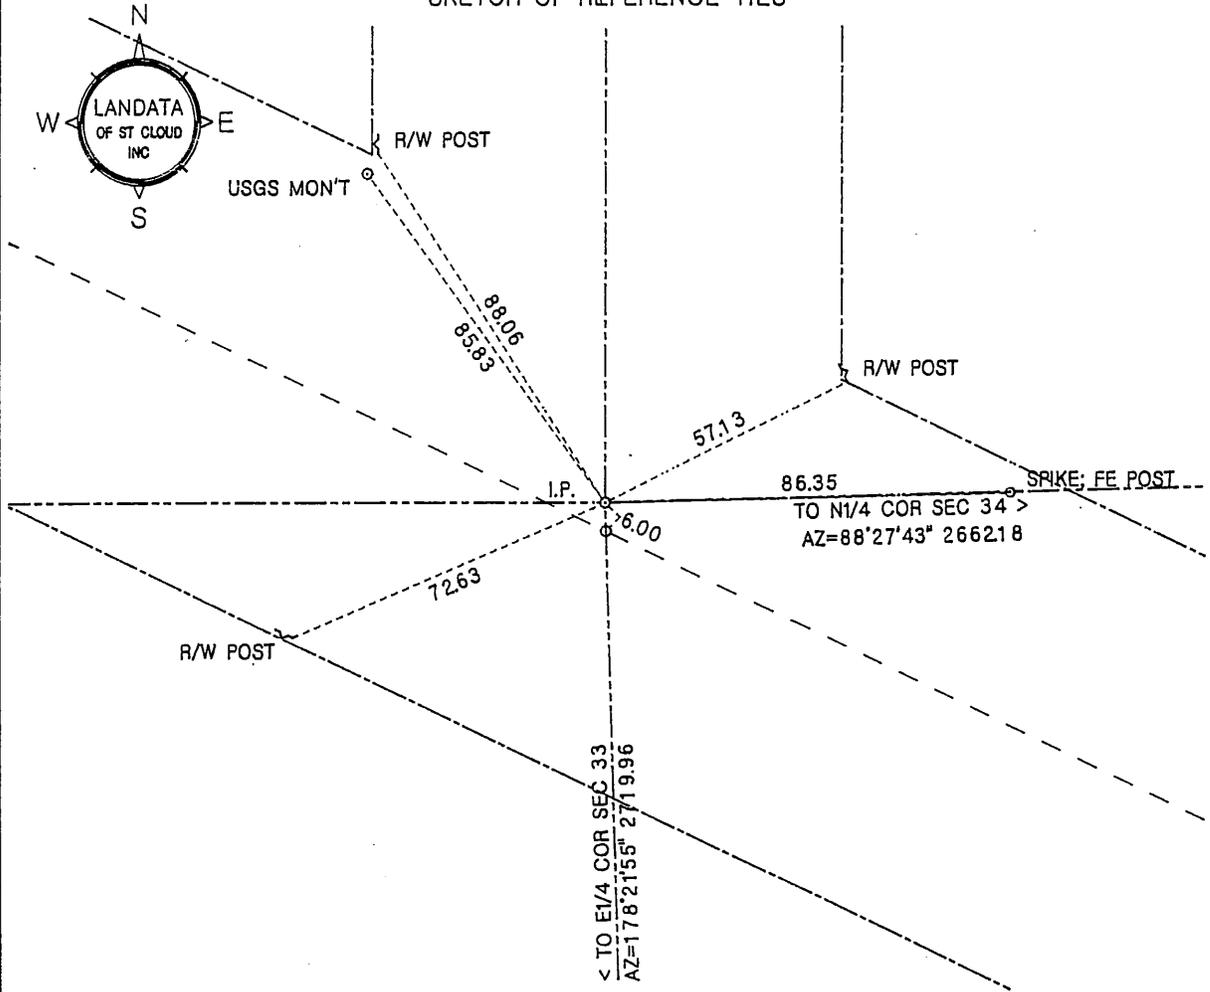

Statement of evidence relative to this corner location on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William F. Lunser 3/13/96
 William F. Lunser, L.S. Date
 Mn Reg No 9394

OFFICE OF THE COUNTY RECORDER
 Benton County, Minnesota
 I hereby certify that this document was filed in this office at ___:___ M. on the ___ day of _____, 19__.

County Recorder _____
 By _____ Deputy

STATEMENT OF EVIDENCE:

No records were found to indicate use or remonumentation of this corner after its original placement by the U.S. Government Survey.

A search of the area failed to uncover the marker. Occupation lines consisting of fences to east, west and road north are well defined.

After comparing measured distances to those of the G.L.O. I consider this corner obliterated with the fence lines and centerline to the north serving as its accessories.


William F. Lunser, L.S.

2 3 4 1 7 3

BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

APR 10 2 34 PM '96

ALICE O. ENCKLMEYER
COUNTY RECORDER

BY mm DEPUTYX^m