

Certified, Filed and or Recorded on
Oct. 07, 2008 AT 02:53PM




Signed: BW
MARILYN J NOVAK B V
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 35, Township 36, Range 28
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 9-25-08 found a CAST IRON MON.
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

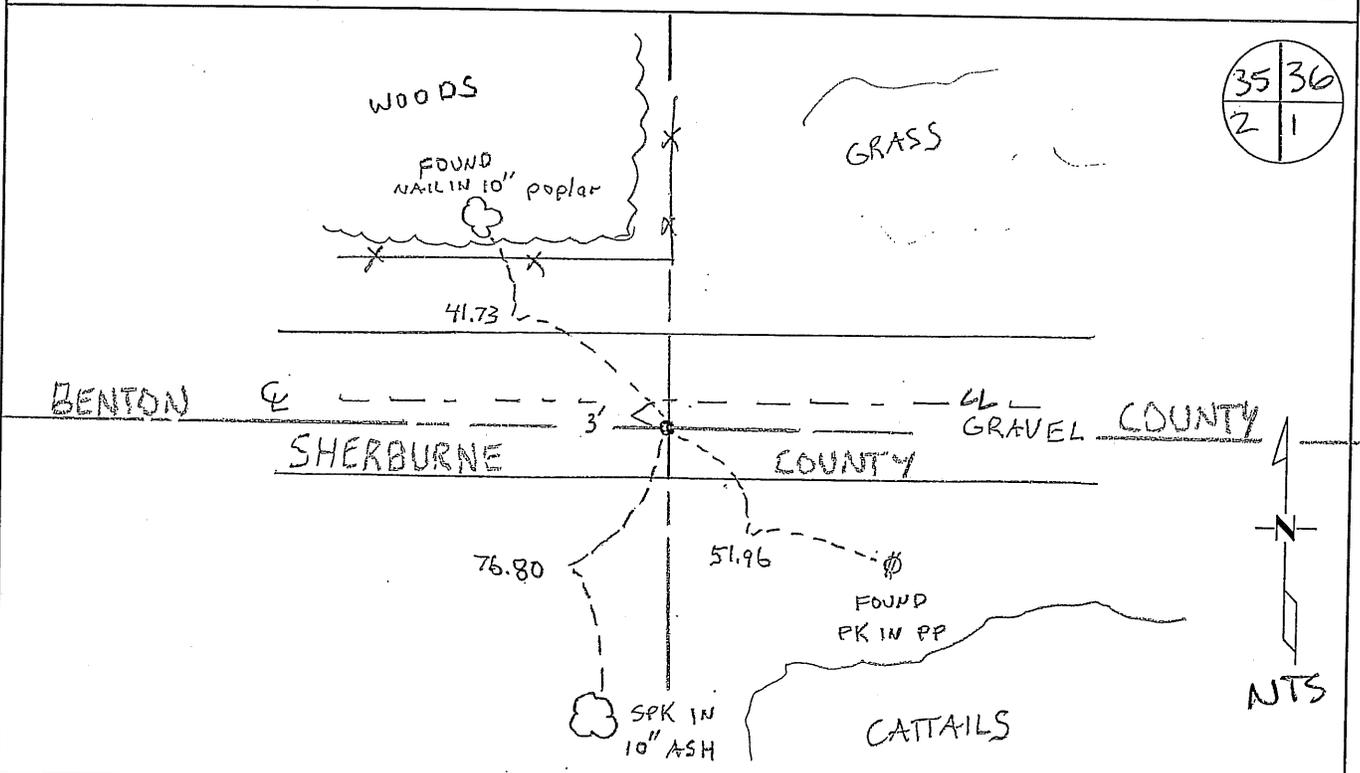

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jan W. Olg
Deputy Benton County Surveyor
License No. 45872

Date: 10/06/08

PAGE 1 OF 2

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:**J354**

The Southeast Corner of Section 35, Township 36 North, Range 28 West, Glendorado Township, 4th Principal Meridian, Benton County, Minnesota.

1849 Original US General Land Office survey set a post for this corner and bearing trees were recorded.

12" Poplar	N 30 ¼ E	421 links
12" Poplar	N 51 ½ W	762 links

1917 County Surveyor's Record Book 1, page 7 contains survey notes by N. Drolson of survey for judicial road between Sherburne and Benton Counties. He states that this corner was marked by a stone in north-south road set by Sherburne County. New ties: 18 " Elm NW 69 links and Tel. Pole S 40 W 64.5 links.

(Book says Section 35, but believe it is the south line of Section 36. Same info for SE corner Sec. 34.)

1972 John Oliver, LS 8194, Sherburne County Surveyor, found standard granite monument and set a cast iron monument. Filed Certificate of Location in Sherburne County.

2000 Sherburne County Surveyor found CIM and updated Certificate. County Coordinates converted from Sherburne County Coordinates NAD83 (1986 Adjustment)
 N - 100219.35
 E - 569161.69

2008 The Benton County Surveyor's Office searched and found the cast iron monument as set over the granite monument in 1972 by John Oliver. The Surveyor accepted the monument and updated ties.

Benton County Coordinates obtained by GPS
 NAD 83 (1996 Adjustment)
 N-100219.717
 E-569161.136