

Certified, Filed and or Recorded on  
Feb. 12, 2010 AT 12:53PM


Signed: [Signature]  
MARILYN J NOVAK G V I  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 2, Township 36, Range 30  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 08/27/09 found a 1" x 1" SQUARE PIN
- left monument as found       lowered monument       removed monument (explain)
- On \_\_\_\_\_ placed an \_\_\_\_\_

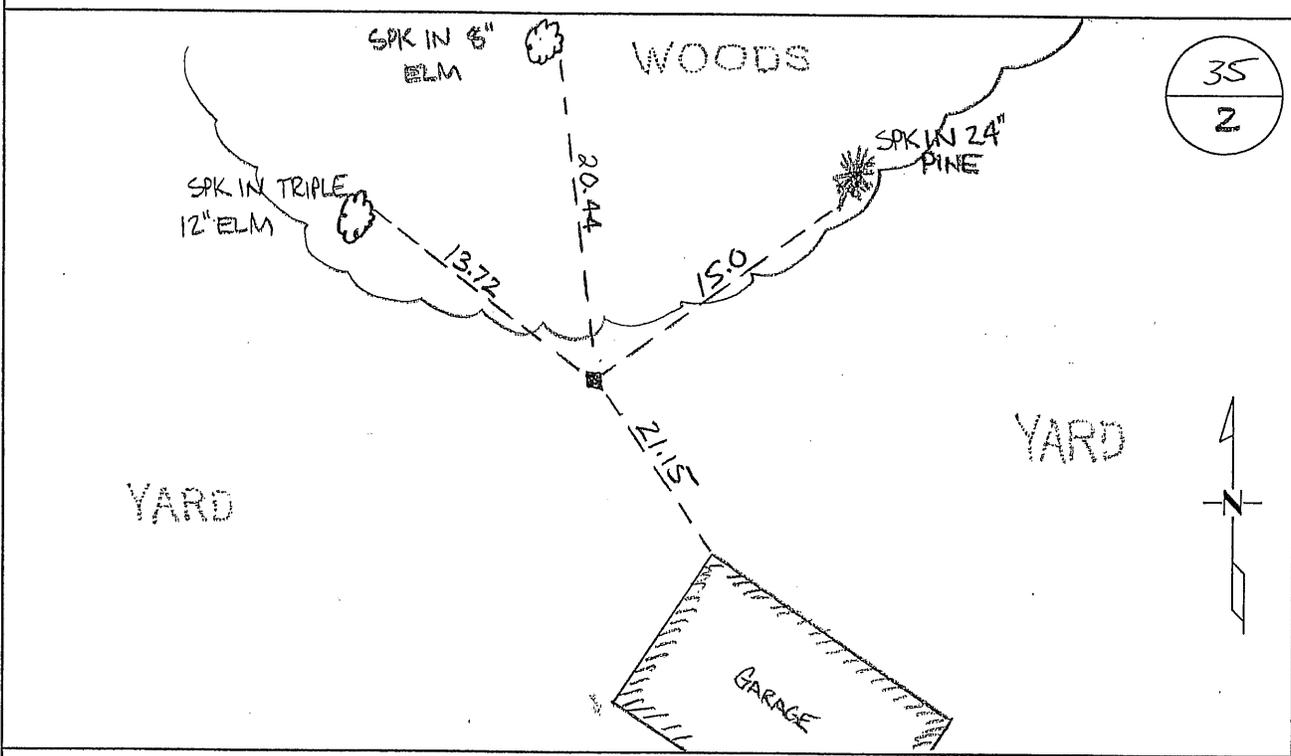

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittstock  
Benton County Surveyor  
License No. 19552

Date: 02/05/2010

**Statement of Evidence:****L021**

The North Quarter Corner of Section 2, Township 36 North, Range 30 West, Minden Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

1849 Original US General Land Office survey marked an 8" Basswood for the corner. No bearing trees were recorded.

193? County records: H. G. Elletson notes a spike with the following reference ties

TP	SE	31.8
TP	SW	55.75

2002 On September 10, 2002, RLK reported finding a square iron, which was pointed out by a woman resident of the area (70+ years). Her father pointed out the square iron to her when she was young as marking the corner.  
County Coordinates from RLK (stated they should be considered 3<sup>rd</sup> Order)  
NAD 83 (1996 Adjustment)  
N- 132257.41  
E- 502566.81

2009 Westwood Professional Services, Inc. found a 1" square iron and measured a distance of 2647.34 feet to the NE corner of Section 2 and 2642.13 feet to the NW corner of Section 2. Reference ties were established.

County Coordinates Obtained by GPS:  
NAD 83 (1996 Adjustment)  
N- 132257.404  
E- 502566.928