

A 361679

Certified, Filed and or Recorded on
Nov. 07, 2008 AT 02:24PM

Signed: MJ
MARILYN J NOVAK
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH QUARTER Corner of Section 16, Township 36N, Range 29W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 10/14/08 found a 1/2" IRON PIPE CAP # 9394 0.3' UP

left monument as found lowered monument removed monument (explain)

On _____ placed an _____

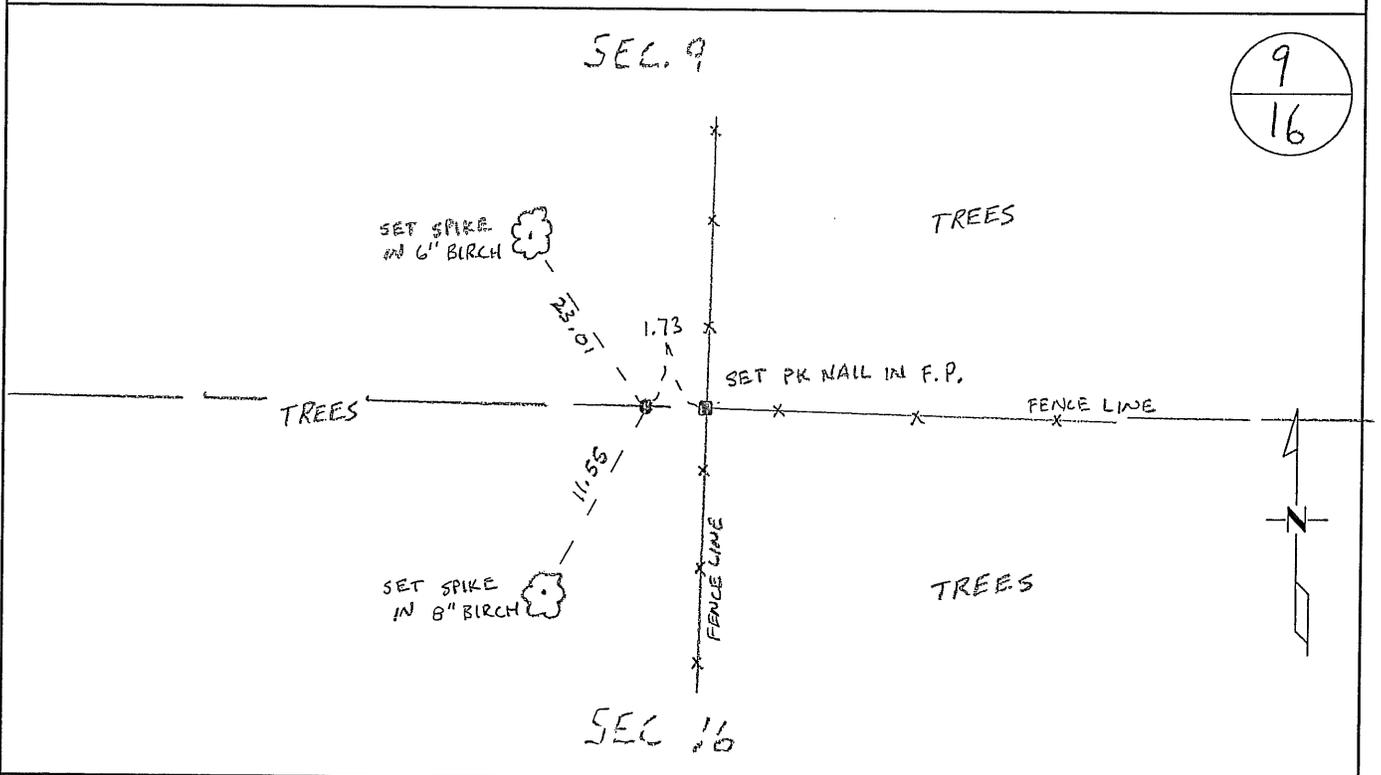

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Juan W. [Signature]
Deputy Benton County Surveyor
License No. 45872

Date: 11/06/2008

Benton County Surveyor's Office
Jason W. Oberg, Deputy County Surveyor
Minnesota License No. 45872

Statement of Evidence:

K161

The North Quarter Corner of Section 16, Township 36 North, Range 29 West, St. George Township, 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey set a wood post was set and bearing trees were recorded:

Elm N 52 ½ E 220 links

2002 No resurvey information was found on this corner in the Benton County records.

2008 The County Surveyor's Office searched and found a ½" iron pipe capped "9394" at 1.7 ft.± west of a north-south fenceline and on line with a fenceline to the east. The Surveyor found the ½" iron pipe 0.91 feet south and 2.52 feet east of the lost position. Position fits occupation and is accepted as the best evidence. Ties were made.

County Coordinates Obtained by GPS
NAD 83 (1996 Adjustment)
N-121753.479
E-524255.090