

Certified, Filed and or Recorded on
Dec. 16, 2008 AT 01:46PM

Signed: BW
MARILYN J NOVAK G. V. J.
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 11, Township 36N, Range 29W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 10/14/08 found a 1/2" IRON PIPE CAP # 42621 UP 0.1'

left monument as found lowered monument removed monument (explain)

On _____ placed an _____

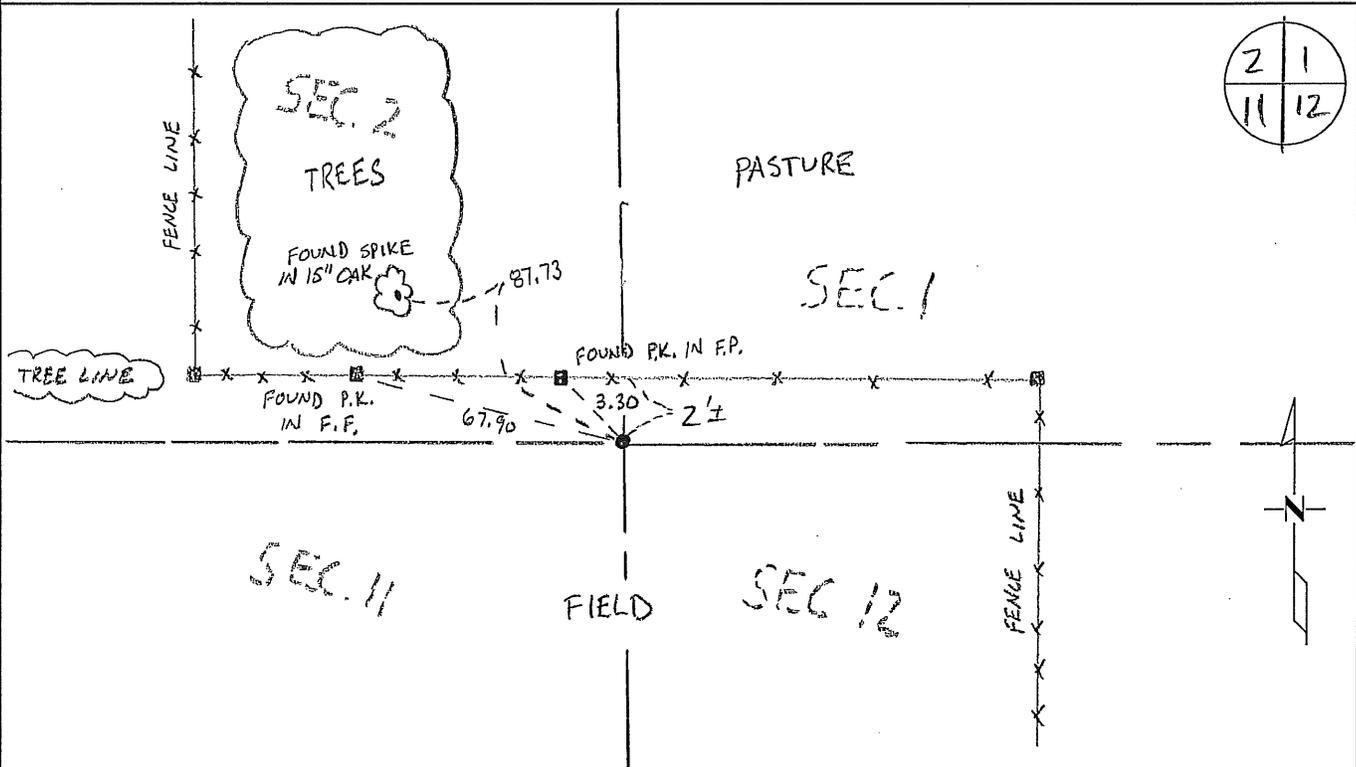

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jan W. Oly
Deputy Benton County Surveyor
License No. 45872

Date: 11/06/2008

Benton County Surveyor's Office
Jason W. Oberg, Deputy County Surveyor
Minnesota License No. 45872

Statement of Evidence:

K112

The Northeast Corner of Section 11, Township 36 North, Range 29 West, St. George Township, 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.

12" Blk Ash	N 53 ½ E	40 links
14" Blk Ash	N 87 W	18 links

2002 No resurvey information was found on this corner in the Benton County records.

2008 The County Surveyor's Office searched and found a ½" iron pipe capped "42621" above ground at 2 ft.± south of an east-west fence line. Position appears to agree with occupation and is accepted as the best evidence. Ties were made.

Coordinates Obtained by GPS
NAD 83 (1996 Adjustment)
N-127436.515
E-537333.236