

Certified, Filed and or Recorded on  
Oct. 14, 2008 AT 10:15AM


Signed: OK  
MARILYN J NOVAK G V  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SOUTHEAST Corner of Section 32, Township 36N, Range 29W  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10/10/08 found a CAST IRON MONUMENT
- left monument as found       lowered monument       removed monument (explain)
- On \_\_\_\_\_ placed an \_\_\_\_\_

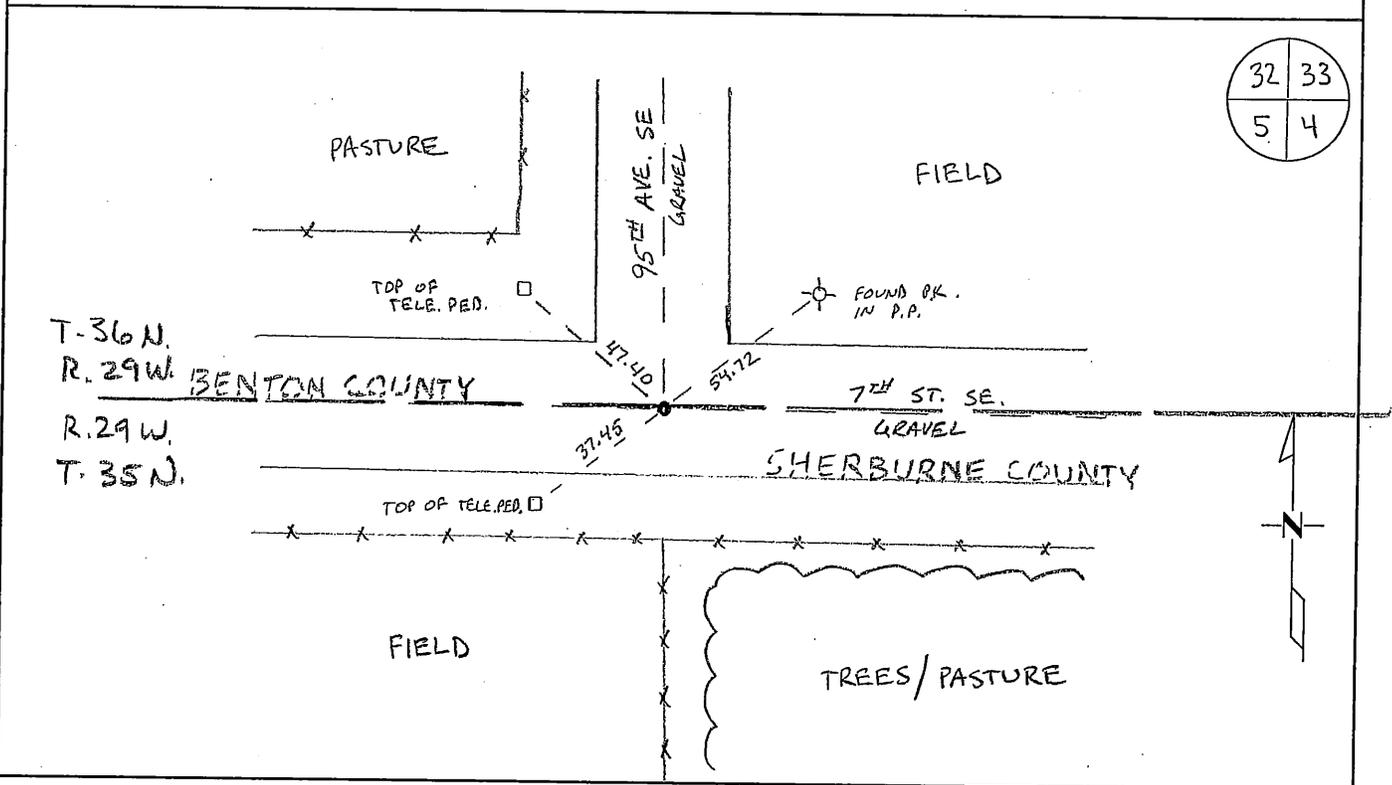

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jan W. Oly  
Deputy Benton County Surveyor  
License No. 45872

Date: 10-13-2008

**Statement of Evidence:**

K324

The Southeast Corner of Section 32, Township 36 North, Range 29 West, St. George Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

1849 Original US General Land Office survey established corner marked by a wood post with bearing trees noted as:

8" Bur Oak	S 8 3/4 W	814 links
6" Bur Oak	S 17 E	545 links

No Date County Surveyor's Record Book 1, page 147, list ties to a granite monument:

TP	NW	77.35
Cor. FP	SW	34.8
PP	NE	55.0

Pre 1940 MN/DOT notes by C. H. West for TH 95 show square stone monument.

1972 John Oliver, LS 8194, Sherburne County Surveyor, found granite monument down 2 feet in road intersection, with roads running west, east, and north. He set a cast iron monument and filed a Certificate of Location in Sherburne County (Doc. No. 121135)

1999 Sherburne County Surveyor's Office found CIM per Document No. 121135 and prepared new Certificate of Location.

County Coordinates converted from Sherburne County Coordinates:

NAD 83 (1986 Adjustment)

N- 100162.52

E- 521620.04

2008 The County Surveyor's Office searched and found a cast iron monument as set by Oliver in 1972, over the stone monument. The Surveyor accepts Oliver's position and updated ties to same.

Benton County Coordinates obtained by GPS to CIM

NAD 83 (1996 Adjustment)

N-100162.835

E-521619.574